


防伪可打印超高频珠宝侦测标签

Tamper Proof Printable UHF Tamper Detection Jewelry Tag




基本参数/Basic Parameters

| | |
|---------------------------|-----------------------------------------------------------------------|
| 尺寸/Size (L/OD x W/ID x H) | 56*15*0.1mm(ID/OD:圆形标签内径/外径,ID/OD:inner/outer diameter of round tags) |
| 面材封装/FaceStock or Housing | 无/without facestock |
| 安装方法/Installation | 胶粘/Adhesive |
| 天线工艺/Antenna Type | 铝天线/Aluminum Antenna |
| 技术/Technology | 平面微带/Microstrip Flat Style |
| 离型纸/Backing Liner | 单面离型透明PET/Single Silicon & Transparent PET Liner |
| 特征/Characters | 防伪(Tamper Proof) |


产品特性/Product Feature

| | |
|--------------------------|---------------------------------------------------------------------------------------------------------------------|
| 芯片/Chip Model | G2IL+ |
| 协议/Protocol | ISO18000-6C GEN2 |
| 频率范围/Operating Frequency | 902-928Mhz |
| 内存/Memory | TID/UID 96bit+ EPC/Block 128bit+ User 0bit+ Reserve 16bit access Password and 16bit kill password |
| 读距/Reading Range | 200cm (depends on reader) |
| 应 介质/Applicable Surface | 空气(Air-free) |
| 个性化选项/Option | 定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding |
| 附加说明/Additional | |

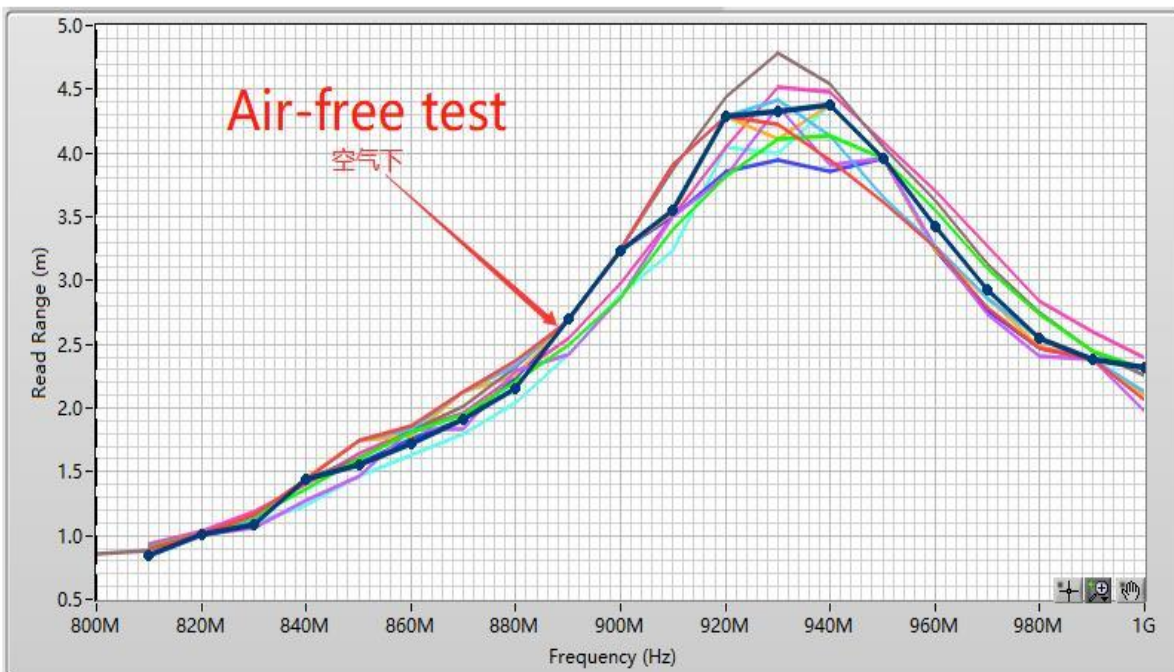

供货方式/Delivery & Supply Format

卷料供货每卷数量1000-3000片(特殊要求见附加说明) Supply in roll with 1000-3000PCS/Roll(Check Additional Note for your specific needs)

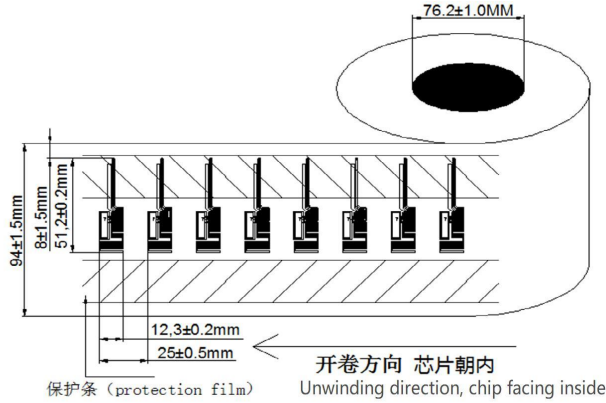

应用场景/Application

珠宝首饰标签由于材料特殊性，具有防水、防刮、耐磨等特点，广泛应用于珠宝首饰柜台展示，提示产品档次，同时也可用于钟表、眼镜等行业，主要功能是快速查找、智能库存盘点、可视化推广，售后跟踪及质量追溯。Particularity of jewelry tag is waterproof, scratch-resistant and wear-resistant. They are widely used in jewelry counter displays to indicate product grades. They can also be used in clocks, glasses, and other industries. The main functions are fast query search and intelligent inventory counting, Visual promotion, after-sales tracking and quality traceability.



环境参数/Environmental Parameter

| | |
|----------------------------|------------------------------|
| 数据保存/Data EEPROM Retention | 10years |
| 静电保护/ESD Limited Voltage | 2KV |
| 工作温度/Operating Temperature | -35℃ - 85℃ |
| 储存温度/Storage Temperature | 0℃ - 25℃ |
| 操作湿度/Relative Humidity | 10%-95%(Variant Performance) |

兼容打印机/Compatible Printers

| | |
|------------|-------------|
| 佐藤/SATO | CL4NX PLUS |
| 斑马/Zebra | ZT411RFID |
| 博思得/POSTEK | TX Series |
| 东芝/TOSHIBA | SX-4T SX-5T |

声明/STATEMENT

上述数据是基于本公司对产品特性的一般了解，仅供一般信息参考。客户购买本产品时应在实际应用条件下测试结果来自行决定是否适用。英诺尔向购买者保证其在材料和工艺上没有不良。The above data is based on our company general understanding of the product attribute, is just for general reference. Buyer should evaluate product under the condition of practical application to decide whether it is suitable for your application. XMinnov guarantee their products to the buyers that there is no defect on product material and fabrication.

批准Approved By: 制作审核Prepared & Checked By: 林阿霞
日期Date: 2021/12/24 日期Date: 2021/12/24