

RFID超高频轮胎补丁标签

RFID UHF Tire Patch Tag

Standard  
标准




基本参数/Basic Parameters

尺寸/Size (L/OD x W/ID x H)	95*35*2.5mm(ID/OD: 圆形标签内径/外径, ID/OD: inner/outer diameter of round tags)
面材封装/Face Stock or Housing	无/without face stock
安装方法/Installation	胶粘/Adhesive
天线工艺/Antenna Type	未定义/None
技术/Technology	无/None
离型纸/Backing Liner	无/None
特征/Characters	普通(General)

产品特性/Product Feature

芯片/Chip Model	UCODE 8
协议/Protocol	ISO18000-6C GEN2
频率范围 /Operating Frequency	860-960Mhz
内存/Memory	TID/UID 96 bit+ EPC/Block 128 bit+ User 0 bit+ Reserve 64 bit
读距/Reading Range	800cm (depends on reader)
应用介质/Applicable Surface	空气(Air-free)橡胶(Rubber)
个性化选项 /Option	定制彩色印刷条码文本或个性化编码 Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding

附加说明/Additional

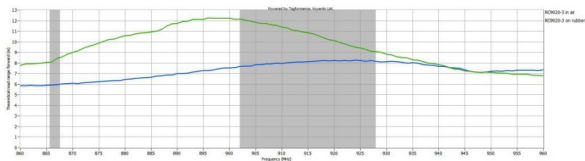

**供货方式/Delivery & Supply Format**

卷材供货每卷数量 1000-3000片(特殊要求见附加说明) Supply in roll with 1000-3000PCS/Roll(Check Additional Note for your specific needs)

**应用场景/Application**

轮胎工业自动化 RFID唯一标识、方便库存数字化管理、防盗、车辆维护保养、产品生产分销溯源管理、轮胎生命周期内质量监控可有效避免安全事故、提高环境保护能力有效管理轮胎报废及回收、数据化、信息化MES MIS环保运营监管 Tire industry automation RFID unique identification, convenient inventory digital management, anti-theft, vehicle maintenance, product production and distribution traceability management, tire life cycle quality monitoring can effectively avoid safety accidents, improve environmental protection capabilities, and effectively manage tire scrap and recycling basing on big data and Informatization MES MIS environmental operation supervision system



**环境参数/Environmental Parameter**

数据保存/Data EEPROM Retention	10years
静电保护/ESD Limited Voltage	2KV
工作温度/Operating Temperature	-40℃ - 85℃
储存温度/Storage Temperature	-40℃ - 230℃
操作湿度/Relative Humidity	10%-95%(Variant Performance)

**兼容打印机/Compatible Printers**

佐藤/SATO	CL4NX PLUS
理当/Zebra	ZT411RFID
博思得/POSTEK	TX Series
东芝/TOSHIBA	SX-4T SX-5T

**声明/STATEMENT**

上述数据是基于本公司对产品特性的一般了解，仅供一般信息参考。客户购买本产品时应在实际应用条件下测试结果自行决定是否适用。英诺尔向购买者保证其产品在材料和工艺上没有不良。The above data is based on our company general understanding of the product attribute, is just for general reference. Buyer should evaluate product under the condition of practical application to decide whether it is suitable for your application. Minnov guarantee their products to the buyers that there is no defect on product material and fabrication.

批准/Approved By: 张瑞勇

制作审核/Prepared & Checked By: 常琳

日期/Date: 2026/06/29

日期/Date: 2026/06/29