

普通超高频EAS+RFID硬标签

Standard  
标准

RF+UHF/AM+UHF Dual Band Frequency Smart Security Apparel EAS Tag




基本参数/Basic Parameters

尺寸/Size (L/OD x W/ID x H)	72.75*30.75*20.75mm(ID/OD圆形标签内径/外径,ID/OD:inner/outer diameter of round tags)
面材封装/FaceStock or Housing	塑料外壳/ABS Plastic Housing
安装方法/Installation	胶粘+磁吸/Adhesive & Magnetic Install
天线工艺/Antenna Type	铝天线/Aluminum Antenna
技术/Technology	空间耦合技术/Air Space Reflection Solution
离型纸/Backing Liner	无/None
特征/Characters	普通(General)

产品特性/Product Feature

芯片/Chip Model	R6-P
协议/Protocol	ISO18000-6C GEN2
频率范围/Operating Frequency	860-960Mhz
内存/Memory	TID/UID 96bits+ EPC/Block up to 128bits+ User up to 32bits+ Reserve 32bit access/32bit kill
读 距/Reading Range	800cm (depends on reader)
应 介质/Applicable Surface	空气(Air-free)
个性化选项/Option	定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding

附加说明/Additional

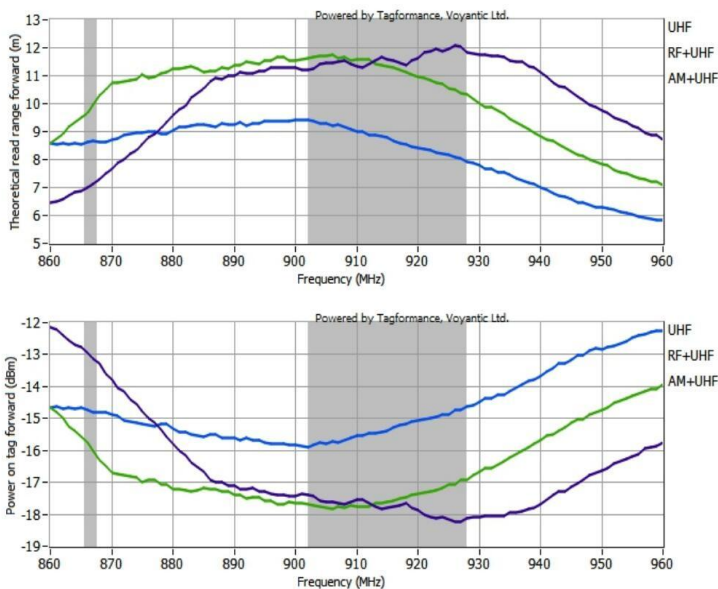

**供货方式/Delivery & Supply Format**

单片/单个/单张供货每袋50-200片/张(特殊要求见附加说明) Supply in piece or sheet with 50-200pcs per box(Check Additional Note for your specific request)

**应用场景/Application**

防盗标签主要是用在门禁、人员出入管理、资产或产品防偷防盗窃、实现产品标识、跟踪、及溯源查询或监管，包括物流供应链、数字化仓储、溯源监管、更甚于箱封、产品QC/保修封条等等。Anti-theft tag mainly used for door access control, membership management, assets or goods anti-theft, product identification for item/goods tracking, monitoring and supervision management. Including logistics supply chain, digital warehousing, source traceability, even more box seal, product QC sticker/warranty seal and so on.

**环境参数/Environmental Parameter**

数据保存/Data EEPROM Retention	10years
静电保护/ESD Limited Voltage	2KV
工作温度/Operating Temperature	-35℃ - 85℃
储存温度/Storage Temperature	0℃ - 25℃
操作湿度/Relative Humidity	10%-95%(Variant Performance)

**声明/STATEMENT**

上述数据是基于本公司对产品特性的一般了解 仅供一般信息参考。客户购买本产品时应在实际应用条件下测试结果来自行决定是否适用 英诺尔向购买者保证其产品在材料和工艺上没有不良。The above data is based on our company general understanding of the product attribute, is just for general reference. Buyer should evaluate product under the condition of practical application to decide whether it is suitable for your application. XMinnov guarantee their products to the buyers that there is no defect on product material and fabrication.

批准Approved By:  
日期Date:2023/12/01

制作审核Prepared & Checked By:李忠明  
日期Date:2023/12/01